


3M™ Particulate Respirator 8211 N95

The 3M™ Particulate Respirator 8211 N95 is uniquely designed to help provide comfortable, reliable worker protection. It is ideally suited for work settings that involve heat, humidity, or long periods of wear.

This respirator offers a number of benefits to you and your workers:

- Meets NIOSH 42 CFR 84 N95 requirements. TC-84A-1299
- **3M™ Cool Flow™ Exhalation Valve**
 - Patented one-way valve offers easy exhalation and cool, dry comfort.
- **Faceseal**
 - Conforms easily to help provide a good seal across a wide range of faces.
 - Comfortable to wear.
- **M-noseclip**
 - Adjusts easily for fewer pressure points and greater comfort.
 - Reduces the potential for eyewear fogging.
 - Helps provide a custom fit and secure seal.
- **Durable braided headband**
 - Provides comfort and durability.

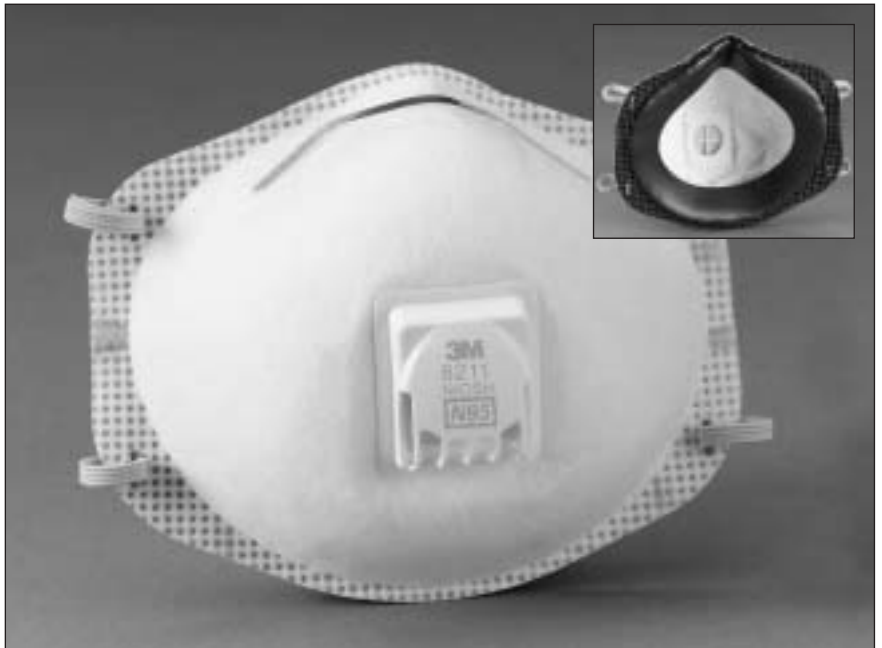

3M™ Particulate Respirator 8211 N95 (Faceseal shown inset)

- **Lightweight construction**
 - Promotes greater worker comfort.
 - Contributes to increased wear time.
- **All filter design**
 - Provides economical protection.
 - No spare parts to clean and maintain.
 - Promotes easier communication.

Suggested Applications

- Grinding
- Sanding
- Sweeping
- Bagging
- Cement
- Poultry
- Textile
- Lime
- Buffing
- Other dusty/hot operations



3M™ Particulate Respirator 8211 N95 (continued)

Respirators Per Box	Respirators Per Case
10	80





Use For:

- Solids such as those from processing minerals, coal, iron ore, flour, and certain other substances.
- Liquid or non-oil based particles from sprays that do not also emit harmful vapors.

Do Not Use For:

- Gases, vapors, including those present in paint spraying operations, oil aerosols, asbestos or sandblasting.
- Aerosol concentrations that exceed 10 times the OSHA PEL or applicable government regulations, whichever is lower.
- This respirator does not supply oxygen.

Technologies

			
Cool Flow™ Exhalation Valve Patented one-way valve for easy exhalation and cool, dry comfort.	M-noseclip Adjusts easily for fewer pressure points and greater comfort.	Faceseal Soft and secure, conforms closely to face for long-lasting comfort and protection.	Advanced Electret Media Advanced electrostatically charged microfibers make breathing easier and cooler.

Fit Testing

Before use of this respirator, a written respirator protection program must be implemented meeting all the requirements of OSHA 20 CFR 1910.134 such as training and fit testing.

Time Use Limitation

If respirator becomes damaged, soiled, or breathing becomes difficult, leave the contaminated area immediately and dispose of the respirator.

Additional Information

This respirator contains no components made from natural rubber latex.



WARNING

This respirator helps protect against certain particles. **Misuse may result in sickness or death.** For proper use, see supervisor or instructions or call 3M OH&ESD Technical Service in U.S.A., 1-800-243-4630. In Canada, call 1-800-267-4414.

For more information

In United States, contact:

Technical Assistance
1-800-243-4630
Sales Assistance
1-800-896-4223
Fax-on-Demand
1-800-646-1655
Internet
www.3M.com/occsafety
E-mail
occsafety@mmm.com

In Canada, contact:

Technical Assistance
1-800-267-4414
Marketing Assistance
1-800-265-1840, ext. 6137
Internet
www.3M.com/intl/CA/ohes.html
E-mail
ohes@ea.mmm.com

For other 3M products:

1-800-3M-HELPS
or 1-612-737-6501



Occupational Health and Environmental Safety Division

3M Center, Building 235-2W-70
P.O. Box 3010
St. Paul, MN 55133-3010

3M Canada Company OH&ES

P.O. Box 5757
London, Ontario N6A 4T1
Canada



10% Post-consumer waste paper.

Printed in USA

© 3M, April 2002 70-0710-9015-6